




Number Plate Clip Installation and Removal Guide

Care must be taken when installing or removing the side clips to prevent breakage. The grip fins are flexible, but the main clip is a durable rigid plastic.

Installation

The clips first need to be attached to the existing plate – please see diagram 1 for correct side of clip. The existing plate must be 3-4mm thick and be able to allow the clip to slide behind it. Some existing fixings will not allow this*

Slide the clips onto the existing plate – see diagram 2.

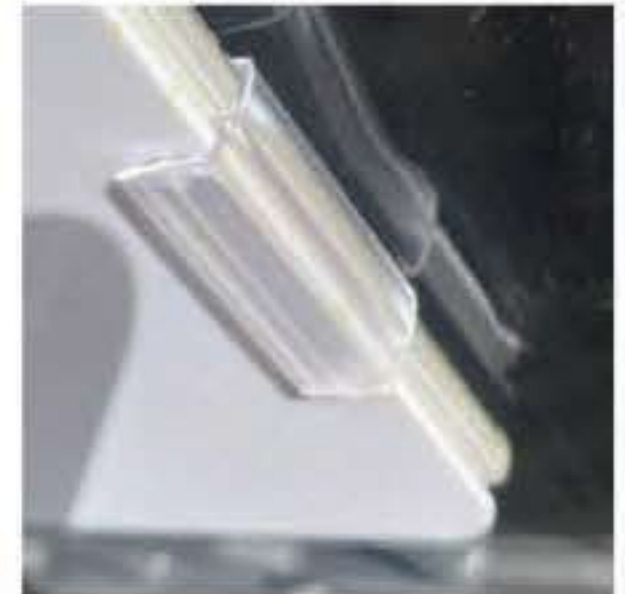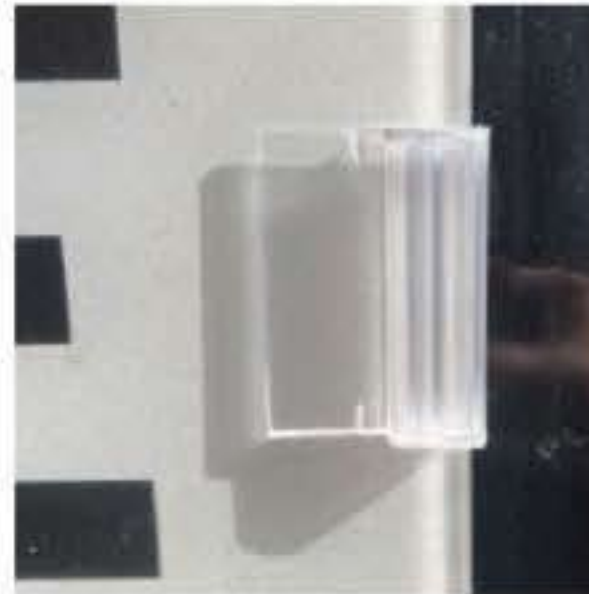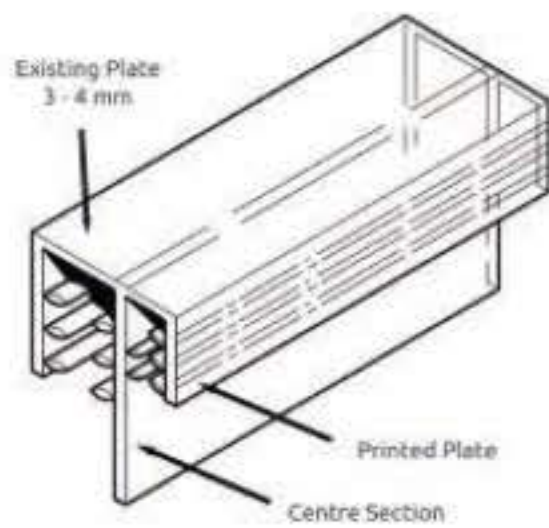

Hold edge of clip and push printed plate into the first clip.

Flex the printed plate slightly to allow it to fit into the second clip – hold edge of clip whilst gently but firmly pushing plate fully in - see diagram 3.

Removal

****WARNING****

When removing the clips and printed plate please do not force the clips open or pull the plate forwards – this will snap the clip.

Grip one clip and flex the printed plate back out of the clip and then remove plate from opposite side.



To fully remove the clips from the existing plate – pull clips sideways away from the plate whilst pressing against the centre section of the clip.

*Please note that these clips may not be suitable for every vehicle or existing plates due to differences in styles, thicknesses, and existing fixings. If you experience difficulties in using the clips we would recommend using the Velcro attachments instead.